DETECTING THE BREAKDOWN OF TRAFFIC

Submission Date: Nov. 15, 2002

Word count: 6099 words.

Xi Zou and David Levinson

Department of Civil Engineering, University of Minnesota

500 Pillsbury Dr. SE, Minneapolis, MN 55455

Phone: 612-625-4021, zoux0015@tc.umn.edu;

Phone: 612-625-6354, Fax: 612-626-7750, levin031@tc.umn.edu

1

TRB 2003 Annual Meeting CD-ROM   Paper revised from original submittal.

ABSTRACT

Timely traffic prediction is important in advanced traffic management systems. Observing traffic flow, we find repetitive or regular behavior over time. By taking advantage of tools in frequency domain analysis, this paper proposes a new criterion function that can detect the onset of congestion. It is found that the changing rate of the cross-correlation between density dynamics and flow rate identifies traffic moving from free flow phase to the congestion phase. A definition of traffic stability is proposed based on the criterion function. The new method suggests that an unreturnable transition will occur only if the changing rate of the cross-correlation exceeds a threshold. Based on real traffic data, the detection of congestion is conducted in which the new scheme performs well compared to previous studies.

Keyword: Traffic Breakdown, Congestion Detection, Density Dynamics, Traffic Stability

2

TRB 2003 Annual Meeting CD-ROM   Paper revised from original submittal.

1. INTRODUCTION

Travel time information and route guidance aim to assist drivers and traffic managers. Successful traffic control systems depend on the quantity and accuracy of the data which must be estimated or predicted from current and historical traffic detector data. Many schemes have been used to predict traffic flow, including dynamic linear models (1), nonparametric regression (2), neural networks (3; 4), ARIMAX (5) and Kalman filtering (6). All of these efforts are mainly based on time-series information from a single location.

Traffic transition is such a complex phenomenon that no single theory completely describes it. The cause of phase transitions and the physical explanation of the critical phenomenon in traffic flow are still unresolved. The onset of phase transition is worth investigating because it sheds light on the prediction or detection of traffic breakdown. That is, if one can understand the phase transition from free flow to jam phases, a potential traffic breakdown can be detected. Furthermore, if one can find the causes that generate the phase transition and can detect these causes, control could be implemented earlier to alleviate or eliminate potential congestion. Kerner (13; 14; 15) proposed the existence of three distinct phases of traffic: Free flow, in which flow is a linear function of density; stop-and-go states (wide-moving jams); and "synchronized flow" which is between free flow and stop-and-go states. In synchronized flow, traffic is moving at lower density; and it appears as a cluster underneath the free-flow line on the q-k curve. His theory was further developed (16, 17) which yielded an approach to predict traffic transitions (19). In his method, the transitions from free flow (F) to synchronized flow (S) and to wide moving jam (J) result from the jam emergence in free flow. The most general transitions from F to S happen when local fluctuation exceeds a critical point. Daganzo et al. (20) argued that the spontaneous nature of queue generation in

Kerner's theory could be deterministically explained by a Markovian model, in which the results of "disturbances" are determined by the initial state of the traffic. But they accepted the incompleteness of this theory and expected an explanation of "the genesis of the disturbances or the rate at which they grow."

This paper aims to detect the transition between phases earlier than the previous studies. Instead of using time domain analysis, this paper applies frequency domain tools. Stathopoulos and Karlaftis (25) first studied this topic and suggested the development of multivariate state-space models for short-term flow forecasting. It is well known that frequency domain analysis quantitatively describes the oscillations of movements. In addition, it is straightforward that the oscillation of traffic flow could represent stability and/or robustness. Ioerger et al. (26) also proposed applications of signal detection tools to identify traffic congestion. In their work, they added some new properties of synchronized flow, wherein flow becomes less a function of density, but more dependent on its recent history. They proposed a method to detect the breakdown traffic. Its advantages and disadvantages will be illustrated and compared with the new method in the sections below.

This paper proposes a new method based on the evaluation of changes in the correlation between flow rate and a quantity derived from density. The results correspond to the onset of traffic breakdown. That makes it a promising traffic detection method. In Section 2, some tools that might be used in traffic studies will be discussed. A new criterion function and its implementation method will be proposed. An application of the newly proposed criterion function in traffic flow stability is also presented in Section 2. Section 3 describes the real-world traffic data that are investigated in this paper and shows the performance of the studied detection methods in identifying real-world traffic congestions. Section 4 concludes this paper.

4

2. METHODOLOGY

2.1 Detection Criterion

Signal processing theories provide numerous methods to process blurred signals and data. From the traffic engineer's point of view, one can apply signal processing to detect many implicit characteristics that hide amidst the vast quantities. In the time domain, signals are shown as the summation of all frequency components. In the frequency domain, the level of each signal can be displayed separately. Traffic data, such as volume and occupancy information obtained from detectors, are always treated as time series. Normally, there are two approaches to characterizing the variance in time series:

- To describe the variance in the product of measurements separated in space or time. This results in auto-covariance or autocorrelation functions for the time series.
- To describe the variance in the tendency of measurements in space or time. This results in a cross-correlation function for the time series.

Our aim is to develop methods that can be put into real-world use. We require they (1) only use historical and current data; (2) can be implemented in real-time computation; (3) must be discrete in terms of time separation.

Filters are the most direct application of signal processing theory after we obtain the decomposed signal in the frequency domain. **Convolution** computations are used in filters because they can eliminate specified frequency components outside the given frequency window.

$$C(f,h) = \int_{-\infty}^{\infty} f(u)h(t-u)du \qquad (1)$$

where: $C(f,h)$ is the convolution of function $f(t)$ and $h(t)$; t and u are time variables. A low pass filter deletes high frequency components to present the basic movement of the signal. But high frequency components, which represent noise and oscillations in the movement, are also

5

important. In traffic engineering, oscillations in speed and flow rate should be treated as normal except those that cause traffic breakdown.

Based on microscopic observations, Ioerger et al.'s (26) method suggests, "Drivers might decrease their velocities in anticipation of increased density in front of them." So they expected an observation of speed drop that depends on the derivative of the density (6). Template Convolution is used to detect pulses in density derivatives. To achieve this, they used a sine curve to approximate a large pulse in the density gradient and developed a "Detector" $\sigma(t)$ as:

$$\begin{cases} \sigma(t) = \{C(g, \sin(u; 0..\pi)) - C(g, -\sin(u; 0..2\pi))\}^2 \\ g = \dfrac{d}{dt} k(u) \end{cases} \tag{2}$$

where: g is the derivative of density; t and u are time variables. Though their detection method can identify speed drops in traffic, it still has some disadvantages. It only considers the density gradient; it over-simplifies pulse formation; and it lacks a physical illustration of its source. Other disadvantages in performance will be shown in the sections below.

In this paper, we will take advantage of both low-pass and high-pass filters to pick up dynamics in traffic flow. The idea is first to find the moving-average of a signal (density in this case):

$$\begin{cases} k_{low} = C(k(t), P(t)) \\ P(t) = \begin{cases} 1 & t_2 < t < t_1 \\ 0 & t < t_2, t > t_1 \end{cases} \end{cases} \tag{3}$$

The filtered high frequency components $k^*(t)$ are restored by subtracting low frequency components from the original signal, which is defined as **Density Dynamics**:

$$k^*(t) = k(t) - k_{low}(t) \tag{4}$$

6

An example of patterns of flow rate, density and density dynamics on a weekday is shown in Figure 1. Density Dynamics $k^*(t)$ is used to present the temporary changes of k above the average. As we discussed above, $k^*(t)$ is sums of the high frequency components of k. The relation between $k^*(t)$ and $q(t)$ is important in that it provides information on the critical change occurring in traffic flow.

Cross-Correlation is always used to detect the diversity of measurements:

$$\langle f, h \rangle = \int_{-\infty}^{\infty} f(u)h(u+t)du \qquad (5)$$

where: $\langle f, h \rangle$ is the cross-correlation of function $f(t)$ and $h(t)$; t and u are time variables. In this research, template cross-correlation is used to detect the variation in the relation of two quantities along time, for instance:

$$corr(k^*, q) = \max \langle \overline{k}^* \cdot \overline{q} \rangle \qquad (6)$$

where $\overline{k}^*$ and $\overline{q}$, templates of k^* and q, respectively, move simultaneously. Template means a consecutive portion of data in a series.

From the observation of the traffic flow, such as patterns in Figure 1, one can see that flow rate q (volume), density k (occupancy), and speed v have different patterns before and within congestion. Density and flow rate have similar patterns except under congested conditions. In congestion, the flow rate q increases a little bit and then drops. The density k increases sharply compared to the flow rate, and thus the speed v drops correspondingly according to $q = k \cdot v$ relation. Loop detectors accurately measure flow rate and occupancy ,which gives an estimate of density. Because the lack of the information on average vehicle length, the density estimate is approximate, as is the estimated speed. Instead of using these rough values, one can see their changes with time as indicators of traffic quality.

7

In this paper, we propose a new method to detect potential traffic congestion. Figure 2, obtained from real traffic data, relates density, density dynamics and flow rate. It includes two-minute traffic data from a detector station on a normal weekday. Figure 2(1) shows a normal k-q relation occurs on highway sections experiencing congestion. It is obviously difficult to discover valuable information from such a disorderly graph. Figure 2(2) shows the relation between the moving-average k and q. One can see an explicit movement of traffic flow in the $\{k, q\}$ space. Two clusters of traffic states are distinctly shown in the graph: one is along the free-flow curve; the other is located in the congested area. Though this result provides support to our methodology, it is insufficient because the moving-average computation eliminates most information about temporary traffic movement. So we combine the former two graphs in Figure 2(3). As one can see, nearly all of dynamic traffic movements cluster below the moving-average curve. On the other hand, these dynamic traffic movements largely go along the moving-average curve in the transition states. Density dynamics is used to present the difference between the dynamic traffic movement and the moving-average states, as shown in Figure 2(4). In distilling k^* from k, high frequency components, which represent oscillations of k, are obtained. Meanwhile, the density gradient information sought by Ioerger's method is also included.

From Figure 2(4), we can see that the relation between density dynamics and flow rate only oscillates slightly during free flow but changes obviously when traffic goes from free flow to congestion. Furthermore, these changes are extraordinarily large in the onset of the phase transitions. For instance, k^* increases greatly in the phase transition from free flow to congestion and decreases steeply in the transition from congestion to free flow. Our aim is to find a quantity to describe the variation among these changes. We conduct a template cross-correlation calculation as Equation (6). The template calculation only uses data in the past and finds the

8

maximum correlation in each step. Cross-correlation finds the correlation of density dynamics with flow rate. So flow rate is considered in this scheme, instead of ignoring it as in Ioerger's method. This improvement is important because it relates the result to empirical observations. We expect drivers decelerate in response to many causes ahead, including incidents, lane changing, roadway geometrics or traffic queuing. These responses result in temporary density disturbances in traffic flow. This disturbance may be associated with traffic breakdown, but is not a sufficient condition. Another condition is the traffic demand exceeds capacity. Traffic flow near capacity is less stable and will breakdown under small disturbances. Traffic flow far below the capacity still can breakdown under very large disturbance such as a serious incident (lowing capacity) or large on-ramp flow (temporarily increasing flow). So it is reasonable to use cross-correlation instead of a single variable to describe the transition movement.

Furthermore, to detect the onset of the transition, we calculate the derivative of the cross-correlation function:

$$z(t) = \frac{d}{dt}\Big(corr(k^*, q)\Big) \tag{7}$$

which generates a new "Detector" function of the traffic patterns. Theoretically, this criterion function tracks the changing rate of the cross-correlation and yields a pulse that is a timely advance to the cross-correlation function. The time advance property will be beneficial to advanced traffic control operation. The performance of this detection method will be presented below.

2.2 Traffic Flow Stability

The computation results based on real world traffic data justified the effectiveness of this function. There is a traffic breakdown only when $z(t) = \frac{d}{dt}(corr(k^*, q)) > z_0$, where z_0 is a threshold obtained from experience. If the changing rate of the cross-correlation exceeds the threshold, the transition is unreturnable. Another important property is that the criterion function has a singular peak in the onset of the phase transition. These results indicate that the criterion function might be a mathematical description of transition in traffic flow which presents the traffic flow moving from stable to unstable states.

In deriving the criterion function, we find concentrations of traffic states in both free flow and congested traffic by means of a moving–average computation, as shown in Figure 2(2). This intuitively provides support of previous studies that suggest distinct phases of traffic flow. Also, the transitions that happened between relatively stable phases represent cases when the system loses or regains stability. Thus the transient condition of traffic flow we obtained sheds light on the concepts of traffic stability and robustness.

If the traffic transitioning from free flow to congestion is considered an unstable state, we can provide a stability criterion as:

Stability Criterion:

The traffic flow will remain stable if the changing rate of the cross-correlation between flow rate and density dynamics is always within a boundary, i.e., $z(t) = \frac{d}{dt}(corr(k^*, q)) < z_0$.

Figure 3 illustrates the basic movement of traffic flow in losing and regaining stability. If the initial state is within the boundary of a stable states cluster, and if the state transition satisfies the stability criterion, we show that the traffic will remain stable. Otherwise, traffic will lose

stability and become congested. The boundary can be obtained from real-world experience. This is a kind of Lyapunov stability. By Lyapunov stability, we mean that state disturbances that satisfy the boundary conditions remain bounded. Unlike Darbha and Rajagopal's (24) definition, the stable states in the *{k, q}* space are not a single point but a cluster with boundary, which represents the states of traffic flow more realistically. The new stability criterion directly provides the explicit condition of traffic transitions in the *{k, q}* space, rather than the implicit relation in previous studies. These advantages make this method more practical.

3. ANALYSIS OF REAL TRAFFIC DATA

This study uses loop detector data on a major interstate freeway near Minneapolis (27). The Minnesota Department of Transportation records a great amount of detector data, with the flow rate and occupancy on each detector every 30 seconds. Speed can also be estimated assuming an average vehicle length.

To simplify the analysis, stations where there is no on and off ramp between them are chosen for investigation. The data of detector station #579 and # 580 are available for analysis, which are located on southbound I-35W near Stinson Boulevard and around 700 meters away from each other. To simplify the problem, the volumes of three detectors in each station are added together, and the occupancies are averaged. In Mn/DOT, a simplified method to get estimated speed is used:

$$speed[i] = 5*vol[i]/occ[i] \qquad (8)$$

where: vol[i] is the volume in veh/s; occ[i] is the occupancy; constant 5 meters is a quantity related to the average effective length of vehicle (including the detector length). But in reality, this simplification will misestimate speed because the average vehicle length varies greatly over

11

Paper revised from original submittal.

time. For instance, at night, the proportion of trucks is larger than during daytime. That results in a higher average length. So in this study, the estimated speed is used only to present the trend of speed movement.

To present the normal pattern of weekday traffic, data from 20 Thursdays from July 6 to November 16, 2000 on Detection Station #579 and #580 in I-35W and Stinson Boulevard are selected from the database. Station #579 is an active bottleneck, which means that the queue formed here has a departure rate that is not affected by the further downstream traffic (20). Station #580 is upstream and is affected by #579. Among these days, no congestion happened on 9 days, morning peak hour congestion happened on 10 days, afternoon peak hour congestion happened on 2 days. The tests of the proposed detector are summarized in Table 1, in which the accuracy of the prediction is satisfactory.

Ioerger's detector and the new detector are implemented and compared by using real traffic data from detector stations. Results are presented below. To present the result clearly, scales of some quantities are changed correspondingly.

3.1 Morning Peak Hour Breakdown

Figure 4 presents the responses of two traffic detectors and the corresponding speed estimate for a period including morning peak hour traffic. As one can see, there is a speed breakdown in the morning peak hour. Both detectors find the potential changes in traffic. The new detector has a higher variance during free flow though it doesn't harm the detection. Ioerger's detector generates more null peaks that mean nothing about detection. The new detector has only one main peak. Furthermore, the new detector generates a response 2-3 time steps ahead of Ioerger's detector, which means an "early" detection of 4 to 6 minutes ahead.

Figure 4 also shows that the up-edge of the main peak appears when the speed begins to drop. In this case, the value of the detector reaches a high level when the speed drops to 75% of average. An explicit breakdown warning can be generated. If one just uses the speed estimate as an indicator, no accurate prediction of the speed breakdown can be made at this point because speed drops to this extent happen frequently, especially in the early morning or sometimes in the middle of the day, as shown in Figure 4. There is time between the breakdown warning to the maximum speed drop point, ranging from 4 minutes to 10 minutes from observations. This time-advance pulse is important because an early detection or prediction might help generate better traffic control to eliminate or mitigate congestion.

3.2 Afternoon Peak Hour Breakdown

In Figure 5, detection of an afternoon peak hour jam is present. The same situations happen here and the new detector still performs well. These results show that the proposed detection method is not affected by the daily variation of density and flow rate data and is capable of detecting congestion occurring anytime. It should be mentioned here that Ioerger's detector always reaches its first peak near the lowest speed. So it is more suitable to detect the extent of congestion than detecting the onset of phase transition.

3.3 No Congestion And Small Speed Drop

Several special traffic patterns are selected to test the reliability of the detector, as shown in Figure 6. In the case of non-congestion pattern in Figure 6(a), though there is a high oscillation of speed in the early morning, neither of the two detectors generates a wrong response. This is

13

important in that they eliminate errors that always happen if only speed is considered in breakdown detection.

In the case of slight congestion in Figure 6(b), both detectors perform well by providing a distinct pulse against normal traffic. It should be mentioned that estimated speed drops with similar amplitude are ignored correctly.

Figure 6(c) shows a wide jam in the morning and a slight speed drop in the afternoon. It is obvious that both detectors can avoid fault detection in speed drop. This property is important because it means the detector can distinguish between real congestion and a false positive of traffic experiencing a small disturbance.

4. CONCLUSIONS

This paper proposed a new criterion function that can detect traffic breakdown more effectively than previous studies that take advantage of traffic information such as density gradient to identify patterns of traffic congestions. Density dynamics and its correlation with flow rate clearly change when traffic transitions from free flow to queuing. The results of the new method based on real traffic data suggests that (1) there is a traffic breakdown only when

$z(t) = \dfrac{d}{dt}\left(corr(k^*, q)\right) > z_0$, where z_0 is a threshold obtained from experience; (2) if the changing rate of the cross-correlation exceeds the threshold, the transition is unreturnable; (3) the criterion function has a singular peak in the onset of the phase transition. These conclusions indicate that the criterion function might be a mathematical description of phase transition in traffic flow.

In deriving the criterion function, we find concentrations of traffic states in both free flow and congested traffic by using a moving–average computation. This intuitively provides support for previous studies that suggest distinct phases in traffic flow. Also, the transitions happened

14

between relatively stable phases that represent cases when the system loses or regains stability. Thus the transient condition of traffic flow we obtained sheds light on traffic stability and robustness.

REFERENCES

1. Lan, C.J. and Miaou, S.P. (1999). Real-time prediction of traffic flows using dynamic generalized linear models. Transportation Research Record, 1678, 168-177.

2. Davis, G.A. and Nihan, N.L. (1991). Nonparametric regression and short-term freeway traffic forecasting. ASCE Journal of Transportation Engineering, Vol. 177, No. 2, 178-188.

3. Nakatsuji, T., Tanaka, M., Nasser, P., Hagiwara, T. (1998). Description of macroscopic relationships among traffic flow variables using neural network models, Transportation Research Record, 1510, 11-18.

4. Park, D., Rilett, L.R., Han, G. (1999). Spectral basis neural networks for real-time travel time forecasting. ASCE Journal of Transportation Engineering, Vol. 125, No. 6, 515-523.

5. Lee, S. and Fambro, D.B. (1999). Application of subset autoregressive integrated moving average model for short-term freeway traffic volume forecasting. Transportation Research Record, 1678, 179-188.

6. Okutani, I. and Stephanides, Y.J. (1984). Dynamic prediction of traffic volume through Kalman filtering theory, Transportation Research part B, Vol. 18B, No. 1, 1-11.

7. Rothery, R. W. (2000). Car following models. In Gartner, N.H., Messer, C., and Rathi, A.K., editors, Traffic flow theory, chapter 4. http://www.tfhrc.gov/its/tft/tft.htm, accessed Feb. 2, 2002.

8. Newell, G.G. (1982). Application of queuing theory, Chapman and Hall, 2nd edition.

9. Prigogine, I. And Herman, R. (1971). Kenitic theory of vehicle traffic. NewYork: American Elsevier.

10. Nagel, K. Shreckenberg, M. (1992). A cellular automaton model for freeway traffic. Journal of Physics I, France, 2: 2221-2229, 1992.

11. Kuhne R. and Michalopoulos, P. (2001) Continuum flow models. In Gartner, N.H., Messer, C., and Rathi, A.K., editors, Traffic flow theory, chapter 5. http://www.tfhrc.gov/its/tft/tft.htm, accessed Feb. 2, 2002.

12. Lighthill, M.J. and Whitham, G.B. (1955). On kinematic wave II: A theory of traffic flow on long crowded roads. Proceedings of the Royal Society of London, A229: 317-345.

13. Kerner, B.S. (1996b) Experimental properties of complexity in traffic flows, Physical Review E, Vol. 53, No. 5, May.

14. Kerner, B.S. (1997). Experimental properties of phase transitions in traffic flow, Physical Review Letters, Vol. 79 No. 20, Nov. 17.

15. Kerner, B.S. (1998a). Experimental Features of Self-Organization in Traffic Flow, Physical Review Letters, Vol. 81 No. 17: 3797-3800, Oct. 26.

16. Kerner, B.S. and Rehborn, H. (1998b). German patent publication DE 198 35 979 (day of notification: August 8[th], 1998).

17. Kerner, B.S. Aleksic, M., Denneler, U. (2000). German patent publication DE 199 44 077; Kerner, B.S. Aleksic, Rehborn, H., Haug, A., Proceedings of 7[th] ITS World Congress on Intelligent Transport System, Turin, paper No. 2035, 2000.

18. Kerner, B.S. (1996a) Experimental features and characteristics of traffic jams, Physical Review E, Vol. 53, No. 2: 1297-1300, February.

19. Kerner, B.S. (2001). Tracing and Forecasting of Congested Patterns for Highway Traffic Management, IEEE ITS Conference Proceedings, Aug.

20. Daganzo, C.F., Cassidy, M.J., Bertini, R.L. (1999), Possible explanations of phase transitions in highway traffic, Transportation Research Part A: 33, 365-379.

21. Treiber, M., Hennecke, A., Helbing, D. (2000). Congested traffic states in empirical observations and microscopic simulations, Phy. Rev. E, Vol. 62, No. 2, August.

22. Lee, H.Y. et al. (2000), Phase diagram of congested traffic flow: An empirical study, Physical Review E, Vol. 62, No. 4, October.

23. Nagatani, T. (1998). Thermodynamic theory for the jamming transition in traffic flow, Physical Review E, Vol. 58, No.4, October.

24. Darbha, S. and Rajagopal, K. R., (1999). Intelligent cruise control systems and traffic flow stability, Transportation Research Part C: Emerging Technologies, Volume 7, Issue 6, December 1999, Pages 329-352.

25. Stathopoulos, A. and Karlaftis, M.G. (2001), Spectral and Cross-Spectral Analysis of Urban Traffic Flows, 2001 IEEE Intelligent Transportation Systems Conference Proceedings, August.

26. Ioerger, T.R., Meeks, J.H., Nelson, P., (2001) Investigation of Density and Flow Relationships in Congested Traffic Using Videogrametric Data. Proceedings of the 80th Annual Meeting of the Transportation Research Board, CD-ROM.

27. MnDOT (2001). ftp://vlsi.d.umn.edu/pub/tmcdata, accessed Feb. 2, 2002..

18

TRB 2003 Annual Meeting CD-ROM   Paper revised from original submittal.

List of tables and figures:

19

TRB 2003 Annual Meeting CD-ROM   Paper revised from original submittal.

Table 1: Speed Breakdown Warning in Detection Station #579 & #580

in I-35W and Stinson Boulevard

	# of Days Have Breakdown	# of Days Don't Have Breakdown
Warning	19(100%)	0(0%)
No Warning	0(0%)	21(100%)
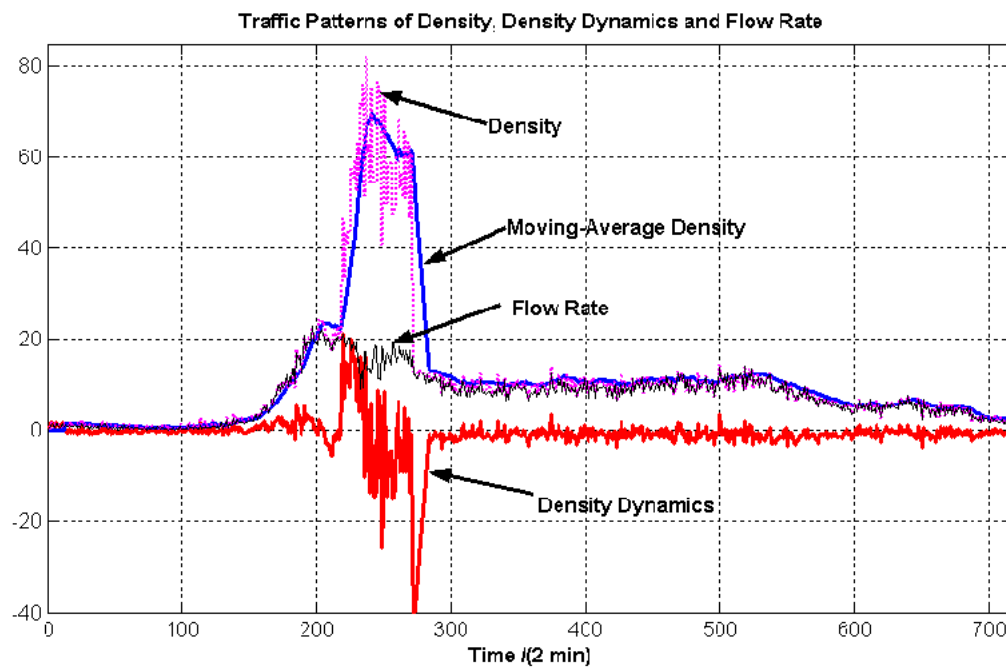
Figure 1. Patterns of density, density dynamics and flow rate
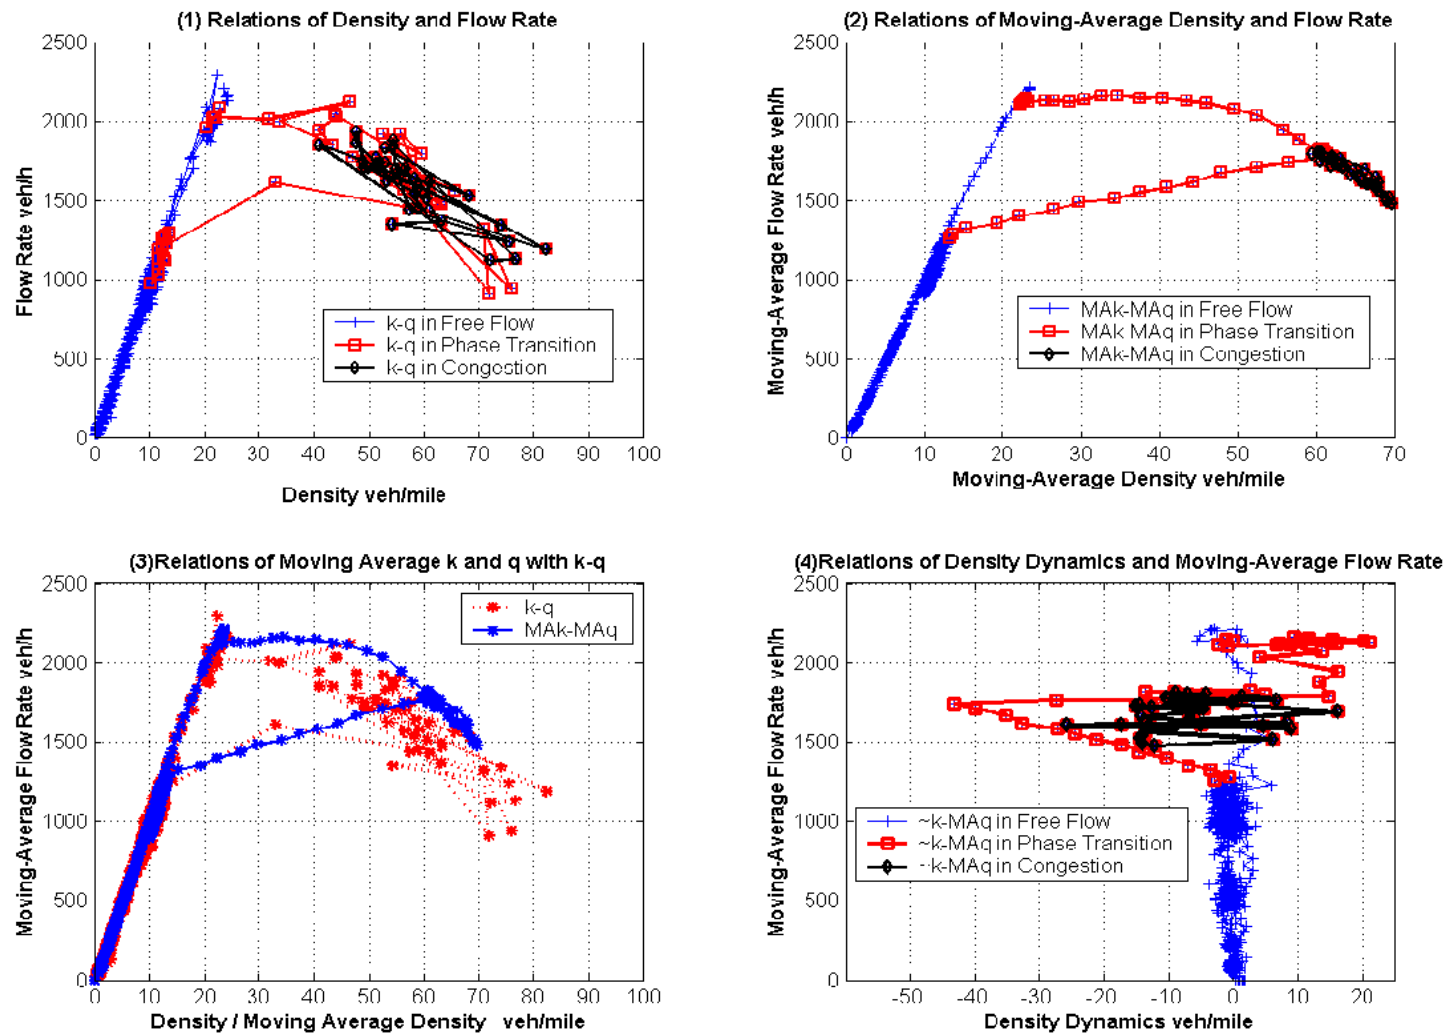
Figure 2. Relation of flow rate with density and density dynamics (~k is k^* in these graphs; MA means moving-average)

Paper revised from original submittal.
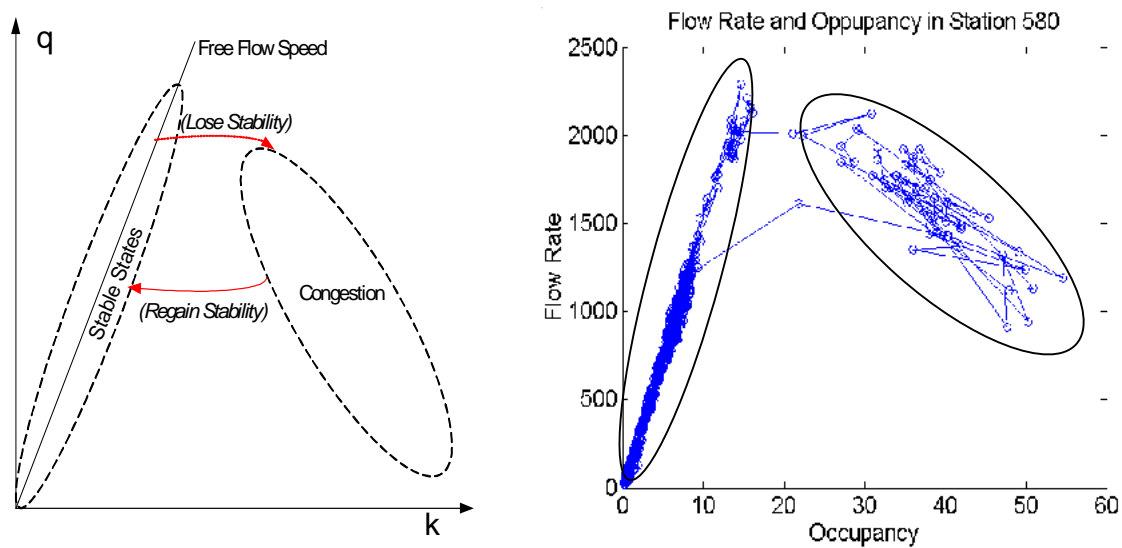
Figure 3. Stability change of traffic flow

Paper revised from original submittal.

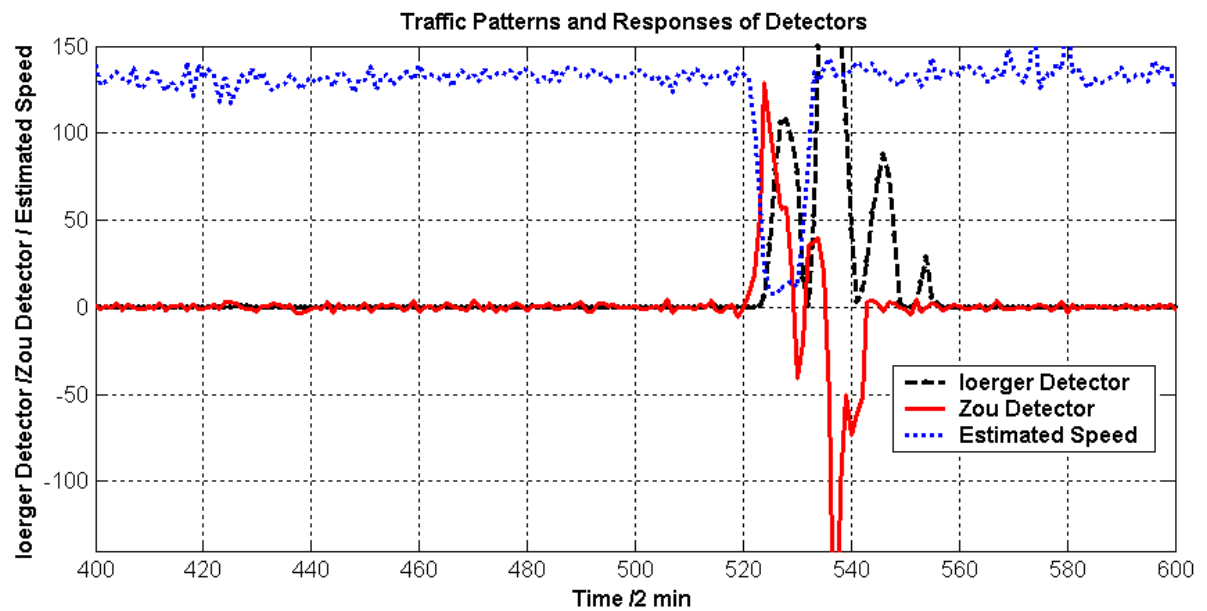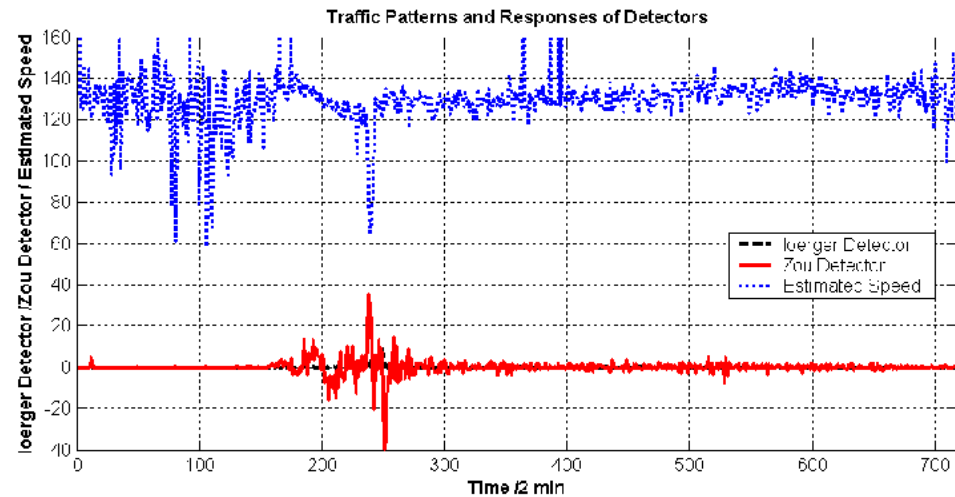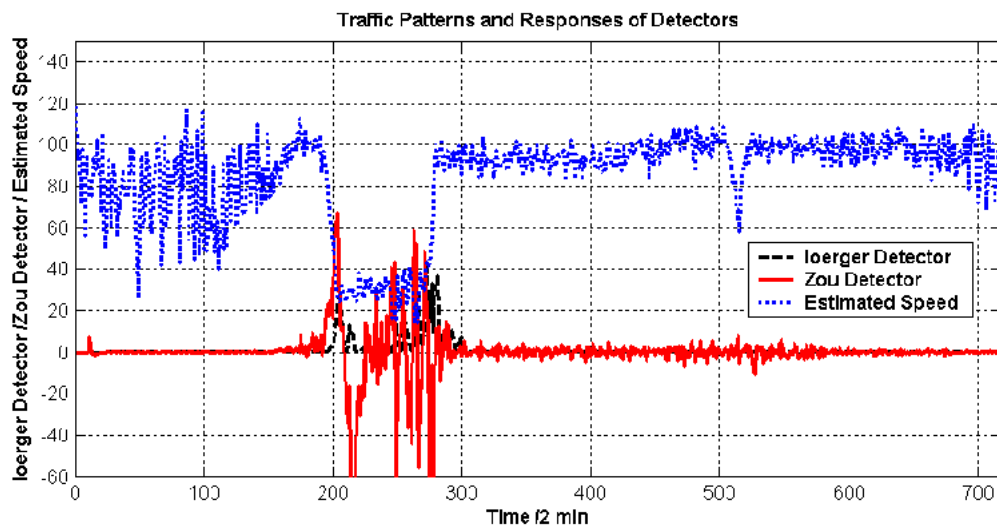**Figure 4. Detector responses of morning peak hour breakdown**

Figure 5. Detector responses of afternoon peak hour breakdown
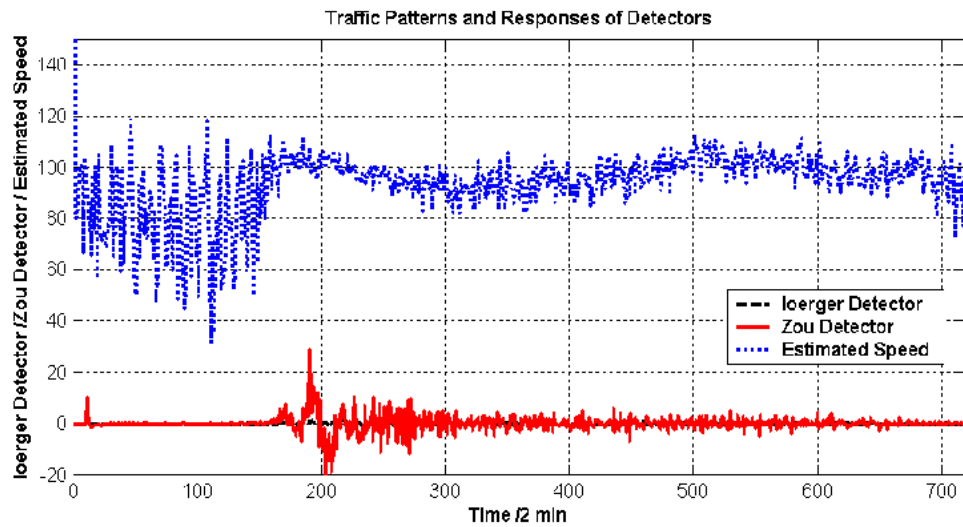
Figure 6. Detector responses in different situations

Paper revised from original submittal.